


AP RECL-E 1W (Item No. 71001)

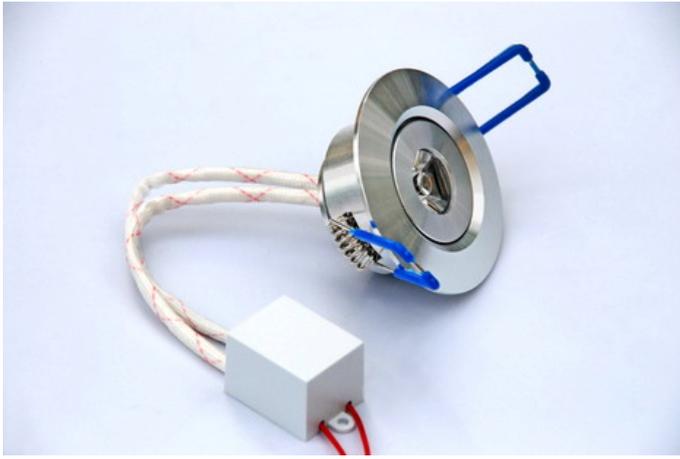

Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: silver color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.

Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 1pcs x 1Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120 degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 1Watts
- Dimensions:** ϕ 60*H25mm
- Color Available:** White/ Warm White
- Lumen:** 81lumen (white) and 76lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year



Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: white color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.

Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 3pcs x 1Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 3 Watts
- Dimensions:** $\phi 90$ *H48mm
- Color Available:** White/ Warm White
- Lumen:** 199lumen (white) and 187lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year

AP RECL-E 9W (Item No.71009)



Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: silver color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.

Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 3pcs x 3Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 9 Watts
- Dimensions:** \varnothing 90*H93mm
- Color Available:** White/ Warm White
- Lumen:** 316lumen (white) and 293lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year

AP RECL-E 5W (Item No. 71005)



Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: white color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.

Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 5pcs x 1Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120 degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 5 Watts
- Dimensions:** ϕ 110*H63mm
- Color Available:** White/ Warm White
- Lumen:** 332lumen (white) and 312lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year

AP RECL-E 7W (Item No. 71007)



Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: white color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.

Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 7pcs x 1Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120 degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 7 Watts
- Dimensions:** ϕ 110*H73mm
- Color Available:** White/ Warm White
- Lumen:** 464lumen (white) and 437lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year

AP RECL-F 9W (Item No. 72009)



Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: white color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.


Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 9pcs x 1Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120 degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 9 Watts
- Dimensions:** ϕ 140*H62mm
- Color Available:** White/ Warm White
- Lumen:** 597lumen (white) and 562lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year

AP RECL-E 27W (Item No. 71027)

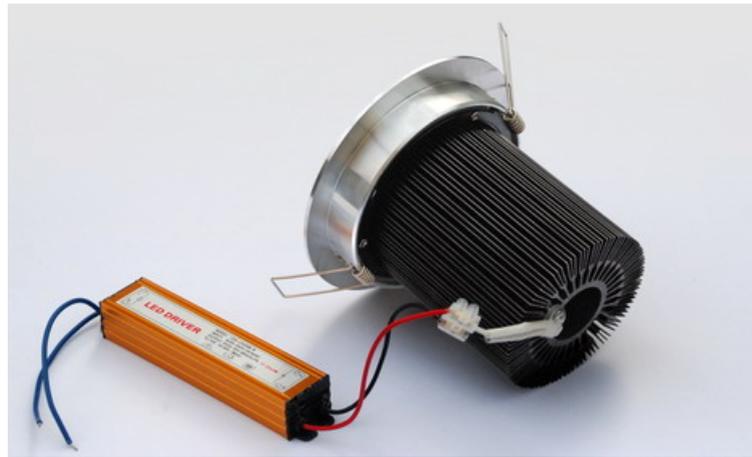

Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: white color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.


Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 9pcs x 3Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120 degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 27 Watts
- Dimensions:** ϕ 140*H62mm
- Color Available:** White/ Warm White
- Lumen:** 948lumen (white) and 892lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year

AP RECL-E 12W (Item No. 71012)

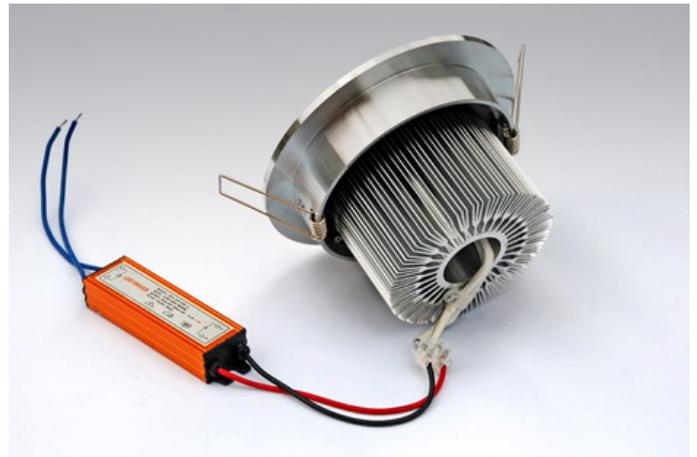

Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: white color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.

Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 12pcs x 1Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120 degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 12 Watts
- Dimensions:** ϕ 140*H82mm
- Color Available:** White/ Warm White
- Lumen:** 796lumen (white) and 749lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year

AP RECL-E 15W (Item No. 71015)



Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: white color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.


Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 15pcs x 1Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120 degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 15 Watts
- Dimensions:** ϕ 145*H92mm
- Color Available:** White/ Warm White
- Lumen:** 995lumen (white) and 936lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year

AP RECL-E 18W (Item No. 70015)

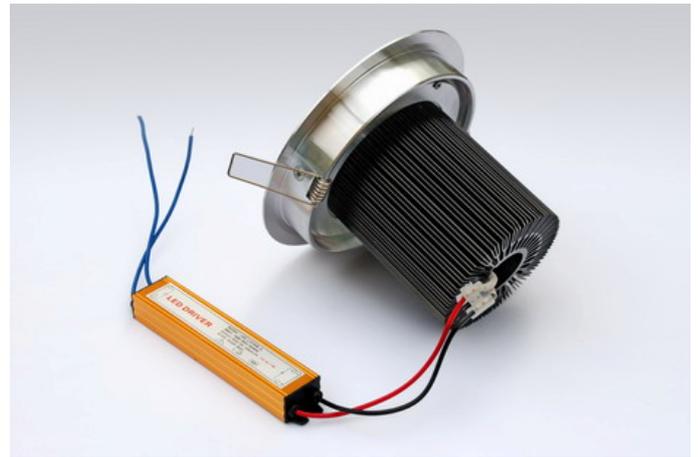

Features

- Housing: Aluminium material with white outer surface, good heat conduction.
- Reflector: white color
- Long lifespan
- High efficient and wide voltage constant current driver keeps stable current of the product.
- This product works as a replacement of traditional Down Light.
- Brightness maintenance rate 70%
- Ideal for hotel, restaurant, commercial & home lighting etc.

Notice

- The thickness of ceiling material should be 5-25mm.
- No sundries around, no cover on the Down Light due to heat sinking concern.

Specification

- Number of LEDs:** 18pcs x 1Watt Epileds LED
- Voltage:** 85-265V AC
- View Angle:** 120 degree
- Color Temp:** 6000K (White), 2800K-3000K (Warm White)
- Power Consumption:** 18 Watts
- Dimensions:** ϕ 160*H122mm
- Color Available:** White/ Warm White
- Lumen:** 1193lumen (white) and 1123lumen (warm white)
- CRI:** 80RA
- Working Temperature:** 0°C~+35°C
- Life:** 30,000 h
- Certification:** CE RoHS Approved
- Warranty:** 1 year